



- Fabricado en acero inoxidable AISI-304 18/10, satinado.
- Capacidad para cubetas GN 1/1 de profundidad máxima 150mm.
- Intervalo de temperatura en la cuba +30°C / +90°C.

	SBSA-80	SBSA-120	SBSA-160	SBSA-200	SBSA-225
--	---------	----------	----------	----------	----------

Dimensiones exteriores (mm)

Largo	800	1200	1600	2000	2250
Ancho	700	700	700	700	700
Alto	850	850	850	850	850

Dimensiones cuba (mm)

Largo	950	950	1275	1600	1925
Ancho	510	510	510	510	510
Altura embutición	150	150	150	150	150
Capacidad (GN 1/1)	3	3	4	5	6

Características

Tª Trabajo (°C)	+50/+90	+30/+90	+30/+90	+30/+90	+30/+90
Potencia (W)	1200	1750	2500	2950	3500
Frecuencia (Hz)	50-60	50-60	50-60	50-60	50-60
Conexión Eléctrica	400 V / 3F+N	230 V / 1F+N	230 V / 1F+N	230 V / 1F+N	230 V / 1F+N




VISTA GENERAL

ALZADO



PLANTA

PERFIL



SBSA-80

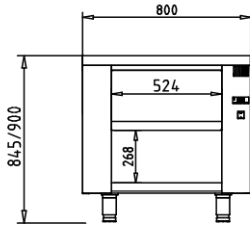



SBSA-120

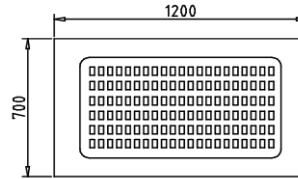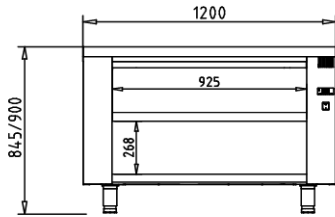



SBSA-160

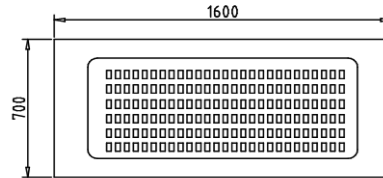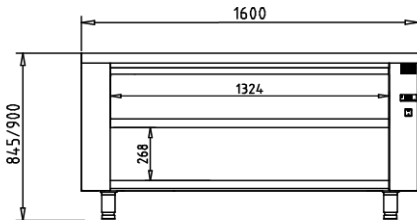

SBSA-200

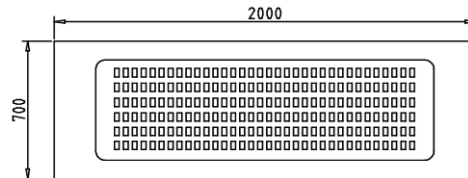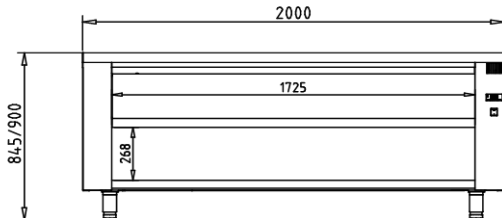

SBSA-225

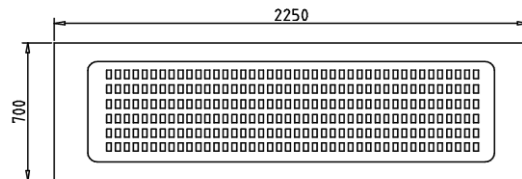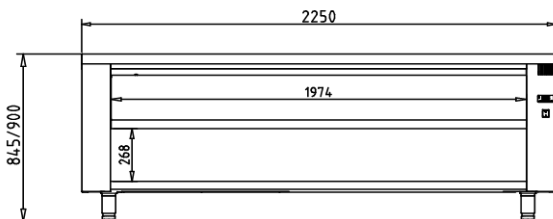

VISTA INFERIOR

CONEXIONES

CONEXIÓN ELÉCTRICA

